


RoHS

SWITCHING SEQUENCE


$C \leftarrow NO$	ON	OFF
$C \leftarrow NC$	OFF	ON

0 0.8 1.5 2.4

TRAVEL POSITION A

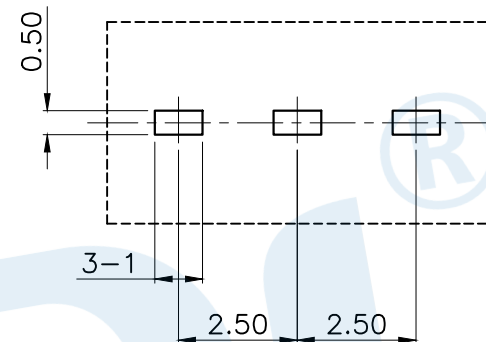

Hole Layout(top view)

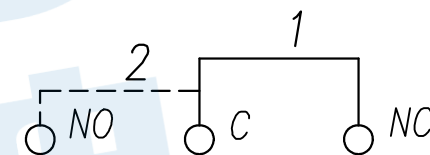

Circuit Diagram

Technical Parameters

- 1.Rated current: DC 30V 0.1A
- 2.Operating force:60±15gf
- 3.Mechanical life: 100,000 times

Ⓕ	Spring		1	SUS	Natural
Ⓔ	Terminal		3	Brass	Silvering
Ⓓ	Contact Reed		1	Phosphor bronze	Silvering
Ⓒ	Button		1	POM	Black
Ⓑ	Cover		1	PA66	Black
Ⓐ	Base		1	Nylon	Black
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	DETECTION SWITCH
Review	date	model	TQ-2518
Approved	date		

Drawing number:

modify Review Approved Tolerance not specified Proportion 1:1 unit mm gage number A4