

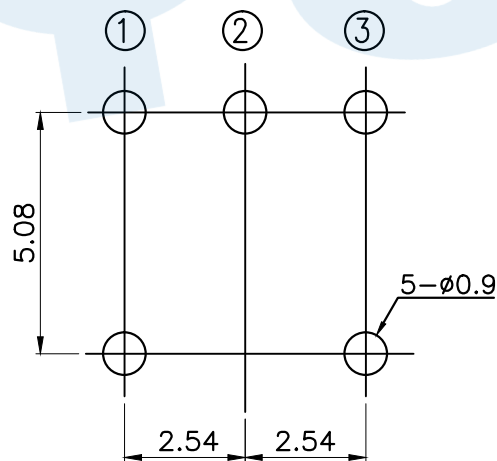
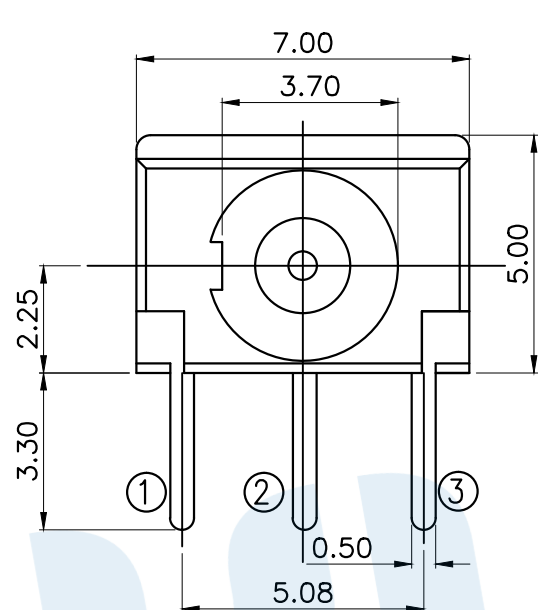



RoHS

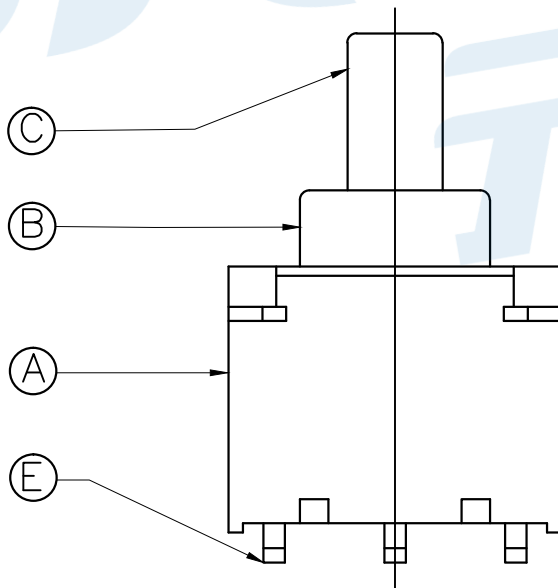

PCB Layout(Pattern side)

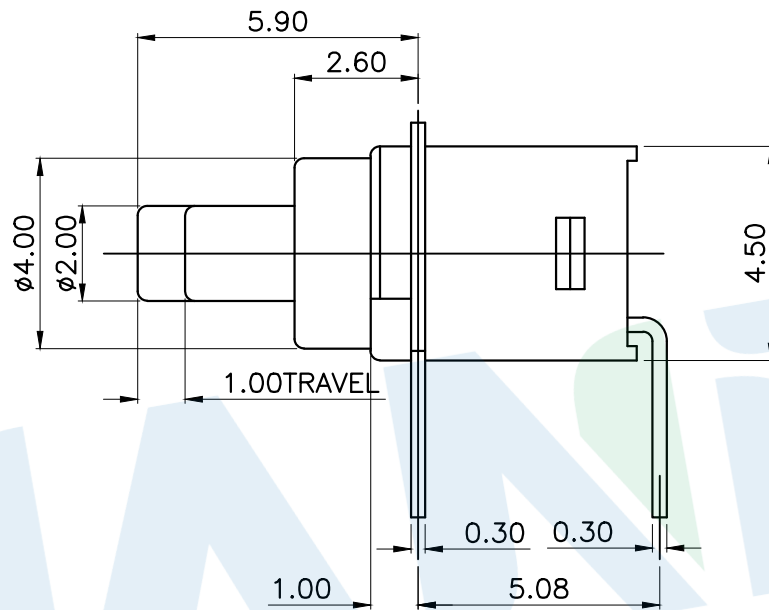

|         |     |
|---------|-----|
| Key Way |     |
| 1-2     | 1-2 |
| ON      | OFF |



Circuit Diagram

Technical Parameters

- 1.Rated current: DC 30V 0.1A
- 2.Operating force:51±10gf
- 3.Mechanical life: 100,000 times

|     |              |        |     |                 |            |
|-----|--------------|--------|-----|-----------------|------------|
| Ⓕ   | Spring       |        | 1   | SUS             | Natural    |
| Ⓔ   | Terminal     |        | 3   | Phosphor bronze | Nu plating |
| Ⓖ   | Contact Reed |        | 1   | Phosphor bronze | Ag plating |
| Ⓒ   | Button       |        | 1   | Nylon           | White      |
| Ⓑ   | Cover        |        | 1   | Nylon           | Black      |
| Ⓐ   | Base         |        | 1   | Nylon           | Black      |
| NO. | Name         | Number | Qty | Materil         | Remarks    |

YUANDI® Yuandi Electronics Co.,Ltd

|          |      |       |                  |
|----------|------|-------|------------------|
| design   | date | name  | DETECTION SWITCH |
| Review   | date | model | TQ-2538          |
| Approved | date |       |                  |

Drawing number: A4

modify Review Approved Tolerance not specified Proportion 1:1 unit mm gage number