

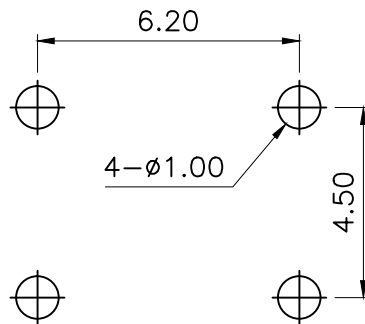



RoHS

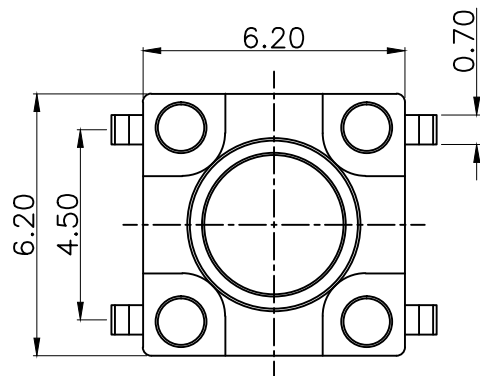

PCB Layout(Pattern side)





Circuit Diagram

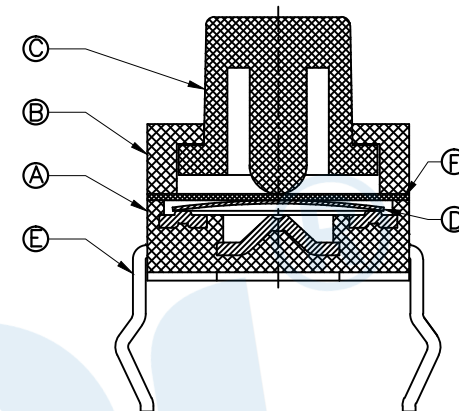

OPERATING FORCE	
CODE	VIGOR
B2	180±50gf
B3	250±50gf
B4	350±50gf

SHRAPNEL	
CODE	MATERIAL/QTY
D1	C5210/1PCS
D2	SUS/1PCS

TOTAL HEIGHT					
CODE	H	φ	CODE	H	φ
A12	9.5	3.1	A17	14	3.0
A13	10	3.1	A18	15	3.0
A135	10.5	3.0	A19	16	3.0
A14	11	3.0	A20	17	3.0
A145	11.5	3.0	A21	18	2.9
A15	12	3.0	A22	19	2.9
A155	12.5	3.0	A23	20	2.9
A16	13	3.0	A24	21	2.9
A165	13.5	3.0	A25	22	2.9

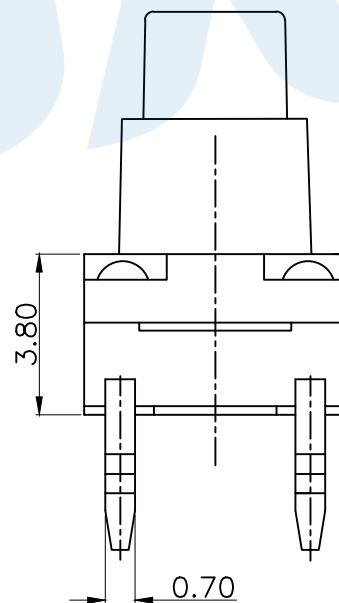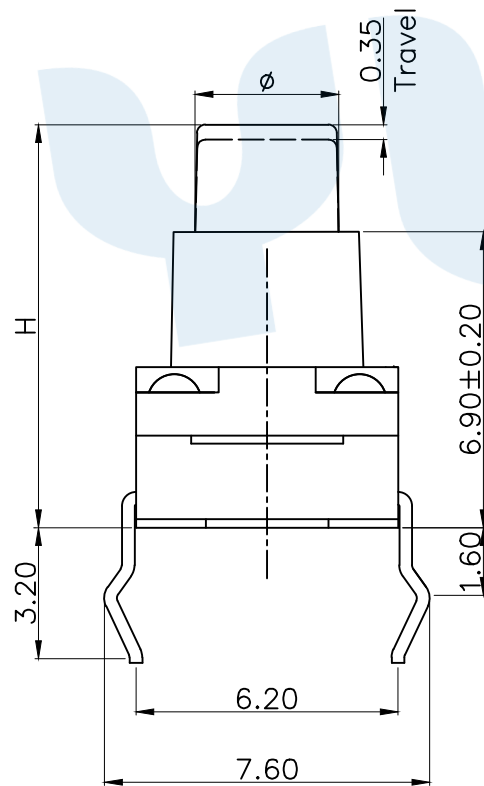

⑥	Waterproof mat		1	Silica gel	Black
⑤	Terminal		4	Brass(0.3t)	Silvering
④	Reed		1	SUS	Silver covered
③	Button		1	PPA	Black
②	Cover		1	PPA	Black
①	Base		1	PPA	Black
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	TACT SWITCHS
Review	date	model	TS-1010A-A□B□-D□
Approved	date		

Drawing number: A4

modify Review Approved Tolerance not specified Proportion 1:1 unit mm gape number