


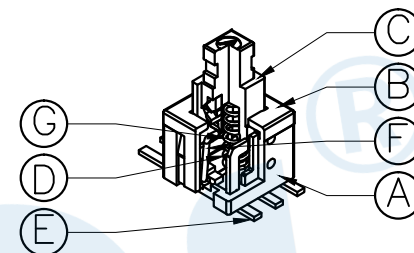
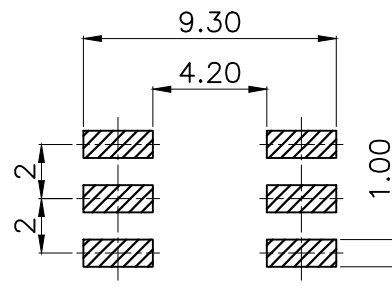
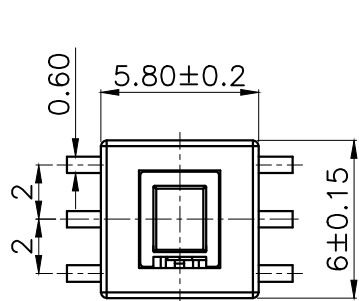

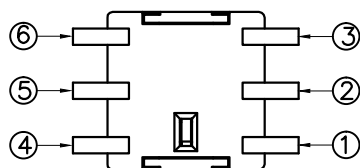


RoHS

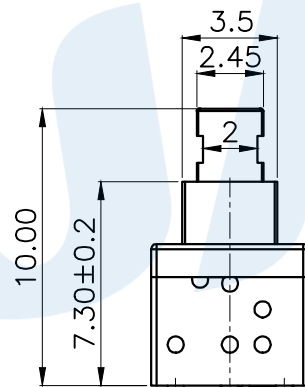

PCB Layout(Pattern Side)

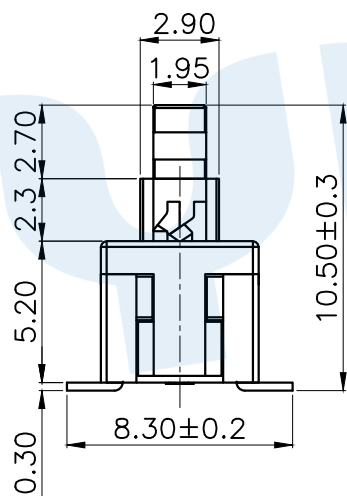

Free Push
Circuit Diagram

NO.	Operating Type	Part No.	Operating force	Travel
1	Push To Lock	TK-6580S-1	250±50gf	2.0±0.2
2	Push No Sound No Lock	TK-6580S-2	250±50gf	2.0±0.2

Ⓒ	Spring		1	SUS	Natural
Ⓕ	Crochet Needle		1	SUS	Natural
Ⓔ	Terminal		6	Brass	Silvering
Ⓖ	Reed		2	Phosphorus Copper	Silvering
Ⓒ	Button		1	PPA	Black
Ⓑ	Cover		1	PPA	Black
Ⓐ	Base		1	PPA	Black

NO.	Name	Number	Qty	Materil	Remarks
-----	------	--------	-----	---------	---------

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	BUTTON SWITCH
Review	date	model	TK-6580S-□
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved

angle	±2°
10~30	±0.30
5~10	±0.20
~ 5	±0.10

Tolerance not specified