
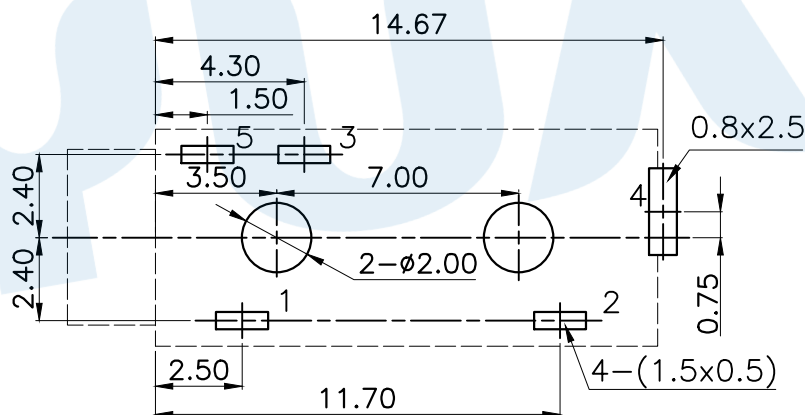
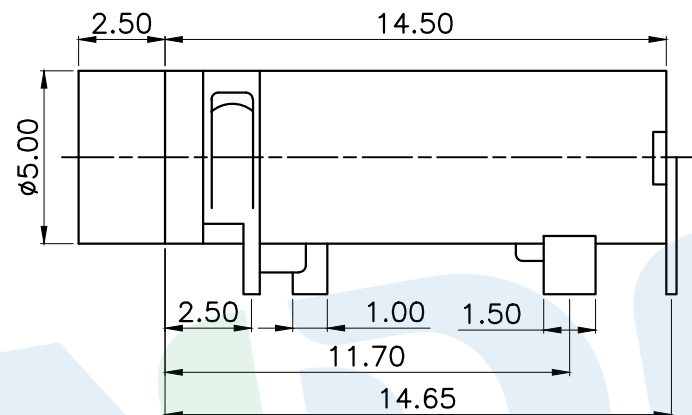


RoHS

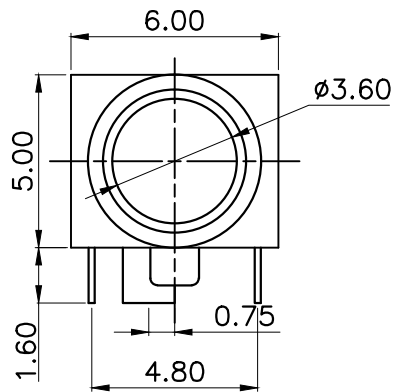

Model No.	PJ-3280A-A	PJ-3280A-B	PJ-3280A-C
Schematic			

Model No.	PJ-3280A-D	PJ-3280A-E
Schematic		

P.C.B LAYOUT(copper-sided view)

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20 ~70
Operating force:3-20N
Operating Life:5,000cycles

⑧	Terminal		5	Phosphor bronze	Ag Plating
⑨	Housing		1	Nylon	Black
NO.	Name	Number	Qty	Materil	Remarks
YUANDI® 元典 Yuandi Electronics Co,Ltd					
design		date		name	PHONE JACKES
Review		date			
Approved		date			
number:				model	PJ-3280A
on	1:1	unit	mm		
gape number				A4	