
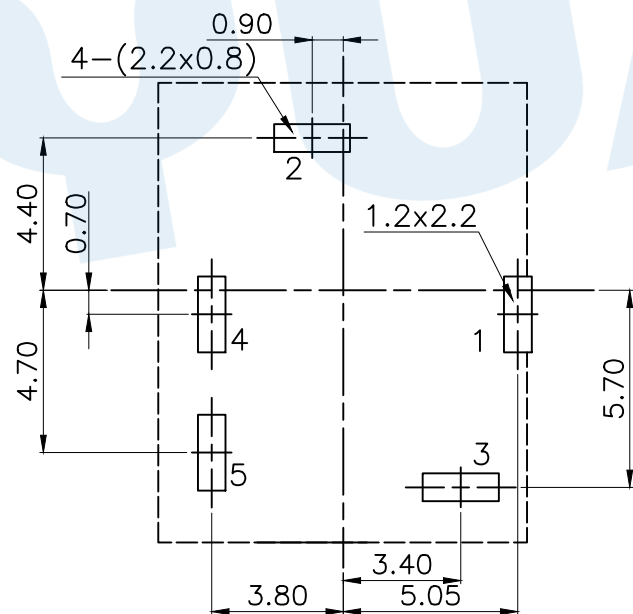
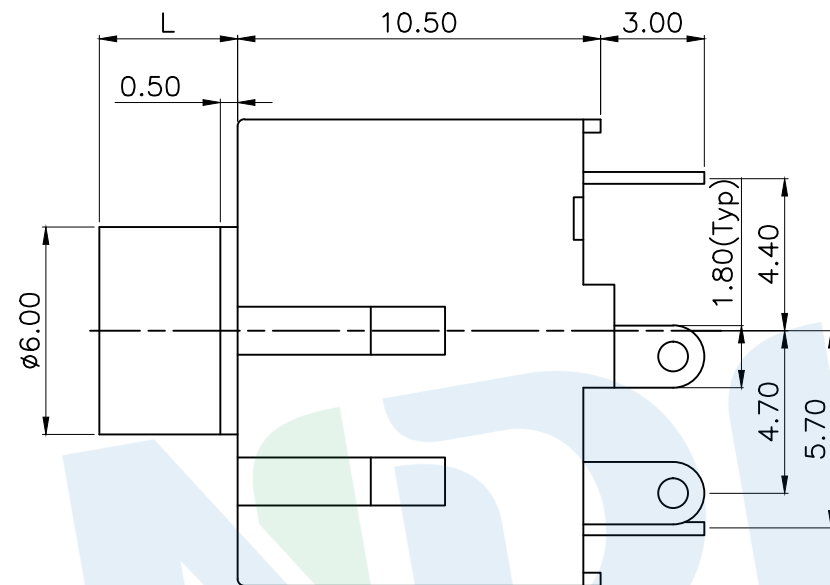


RoHS

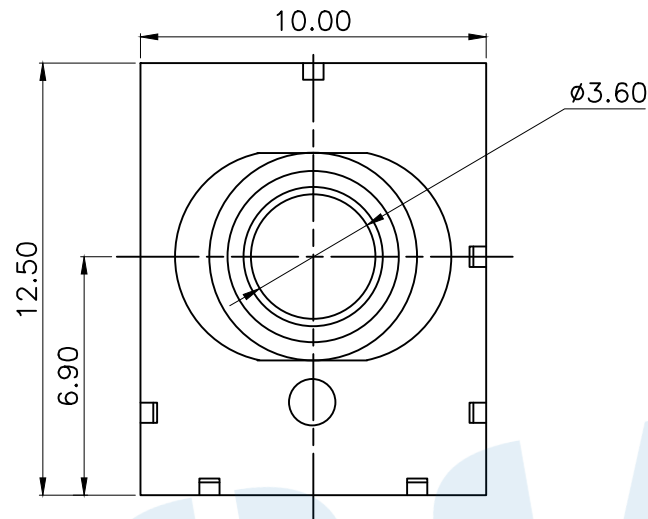

P.C.B LAYOUT(copper-sided view)

|           |            |            |            |
|-----------|------------|------------|------------|
| L=4.0     | PJ-3540A-A | PJ-3540A-B | PJ-3540A-C |
| L=4.3     | PJ-3540A-D | PJ-3540A-E | PJ-3540A-F |
| Schematic |            |            |            |

Rating:0.5A 30V DC  
Contact Resistance:100 m $\Omega$  Max.  
Operating temperature:-20 ~70  
Operating force:3-20N  
Operating Life:5,000cycles

|                                   |          |        |     |                 |              |
|-----------------------------------|----------|--------|-----|-----------------|--------------|
| Ⓑ                                 | Terminal |        | 5   | Phosphor bronze | Ag Plating   |
| Ⓐ                                 | Housing  |        | 1   | Nylon           | Black        |
| NO.                               | Name     | Number | Qty | Materil         | Remarks      |
| YUANDI® Yuandi Electronics Co,Ltd |          |        |     |                 |              |
| design                            |          | date   |     | name            | PHONE JACKES |
| Review                            |          | date   |     |                 |              |
| Approved                          |          | date   |     |                 |              |
| number:                           |          |        |     | model           | PJ-3540A     |
| on                                | 1:1      | unit   | mm  |                 |              |
| gape number                       |          |        |     | A4              |              |