
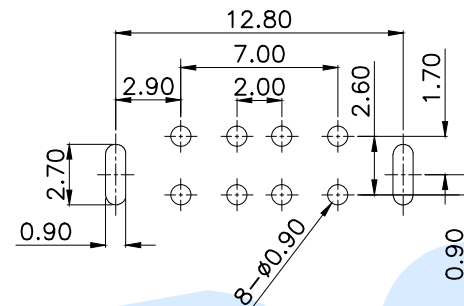
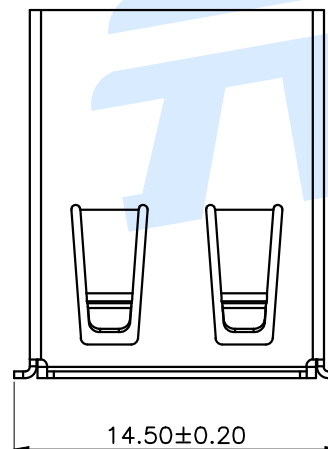
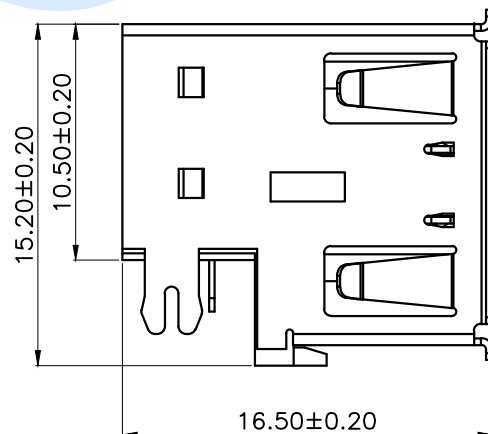
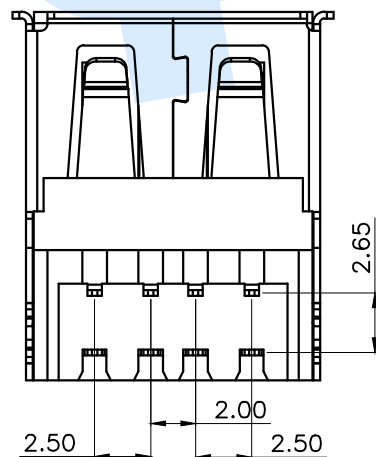
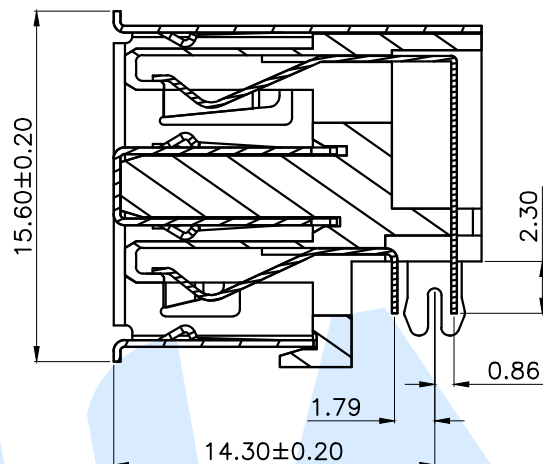


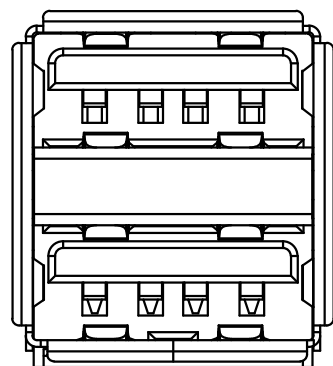

P.C.B Layout(Pattern side)

规格说明:Specifications

电气特性:Electrical

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms Max
4. 耐电压: Dielectric Withstanding Voltage
AC 500V/1MINUTE.
5. 绝缘阻抗: Insulation Resistance
1000MEGA Ohms Min

物理性能:Mechanical

- 1.插拔力:Connector Mate and Unmate Force
Insertion force:35N(3.57kgf)MAX
Extraction force:10-35N(1.02-3.57kgf)Min
端子保持力:Terminal Retention
1.0kgf(MIN)
耐久性:Durability
3000cycles.EXTRACTLON FORCE:
10-35N(1.02-3.57kgf)

Ⓒ	Terminal		8	Brass	Ag plating
Ⓑ	Shell		1	SPCC	Ni Plating
Ⓐ	Base		1	PBT	Black
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co,Ltd

design	date	name	USB CONNECTOR
Review	date		
Approved	date		
number:		model	USB90-48-T1-W

							angle	±2'
							10~30	±0.30
							5~10	±0.20
							~ 5	±0.10
				modify	Review	Approved	Tolerance not specified	